


E Access™
by Continental

Embedded Single Door Controller

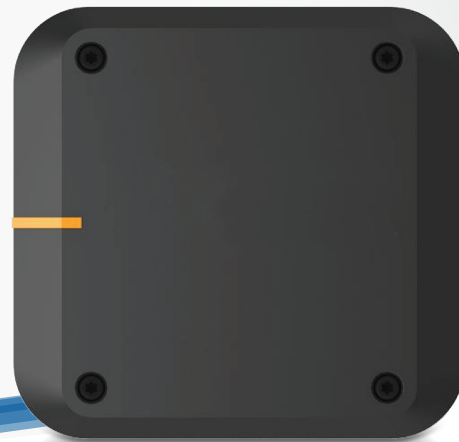

CA-1DM 1-Door Controller,
Expandable up to 4 Doors
with Basic Power

Features

- Simple to use, Self-Contained, Scalable Access Control Solution
- Each controller functions as a Server, expansion panel or elevator module
- Ready out of the box, browser-managed
- Embedded Linux Operating System
- 2 Readers (In/Out)
- 2 Relays (Lock/Aux)
- 3 Inputs (REX, DPS, Aux) Global
- UL Listed - UL294 Series 7th Ed.
- Includes Mounting Bracket
- 5-Year Hardware Warranty

Optional Accessory

- **POE-1DC-**
12VDC 2A POE Power Supply



Model	CA-1DM
Processor	Quad Core Cortex, 1.5 GHz
Memory	1 GB DDR3 & 8 GB eMMC
Operating System	Embedded Linux
Transactions	> 45 per second
System Power Requirements	Regulated 12VDC @ 2A, Class 2 (not supplied)
Operating Temperature	50°F to 95°F (10°C to 35°C)
Enclosure Size (W x H x D)	3.2 x 3.0 x 1.3in (81 x 78 x 32mm)
Standby Power Requirement	350mA @ 12V
Number of Doors	2 Total, One In & One Out Reader
Readers (Wiegand)	2 Total, One In & One Out Reader for Each Door
Reader Power	300mA @ 12V Max per Reader 600mA @ 12V Max per System
Request to Exit (REX) Inputs	1
Door Position (status) Inputs	1
Auxiliary Input	1
Tamper Digital Input	N/A
Power Fault Digital Input	N/A
Door Lock Outputs	1 Form C Relay, 24V @ 1.0A
Auxiliary Outputs	1 Form C Relay, 24V @ 1.0A

Continental Access

CONTINENTAL, A DIVISION OF NAPCO SECURITY TECHNOLOGIES, INC.

355 BAYVIEW AVE., | AMITYVILLE, NY 11701 | 1.800.645.9445 | 631.842.9400 | FAX 631.842.9135 | WWW.CICACCESS.COM

E-ACCESS IS A TRADEMARK OF CONTINENTAL DIVISION OF NAPCO. OTHER TRADEMARKS INDICATED ARE PROPERTY OF THEIR RESPECTIVE COS. PDS, SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE (C) 10.2020 A787